



| Specifications for Rotator | | |
|----------------------------|-------------------------|--|
| 1 | Model | LPP5-5-20-FM-WE |
| 2 | Loading Capacity | 2.5 TON |
| 3 | Turning Capacity | 5 TON |
| 4 | Vessel Size Min. | Ø235 at 90° included Angle at C-C 400mm |
| 5 | Vessel Size Max. | Ø5517 at 40° included Angle at C-C 2000mm |
| 6 | Tyre Type & Size | Polyurethane, Ø330 x 80mm, Shore 'A' 90-95 |
| 7 | Roller Speed | 103.2 to 1032mm/min at 5 to 50Hz |
| 8 | Roller Drive Motor | 2 x 0.37 kW c/w Force Cooling |
| 9 | Roller Drive Control | 0.75kW AC Inverter |
| 10 | Electrical Panel | Yes |
| 11 | Incoming Supply | 380/400/415V-3P-50Hz or 440/460/480V-3P-60Hz |
| 12 | Control Voltage | 24Vac |
| 13 | Control Means | Via Push Button Pendant c/w 10m Cable |
| 14 | Surface Preparation | Gritblast to SA2.5 |
| 15 | Painting | Powder Coating |
| 16 | Colour | RAL3003 Red & RAL9005 Black for skid and drum only |
| 17 | Qty | 1 unit |
| 18 | Weight(kg) | 370 |
| 19 | Shipping Dimension (cm) | L310 X W50 X H57 |

Note: :
1) This drawing is accurate at time of preparation and may be subjected to final design.

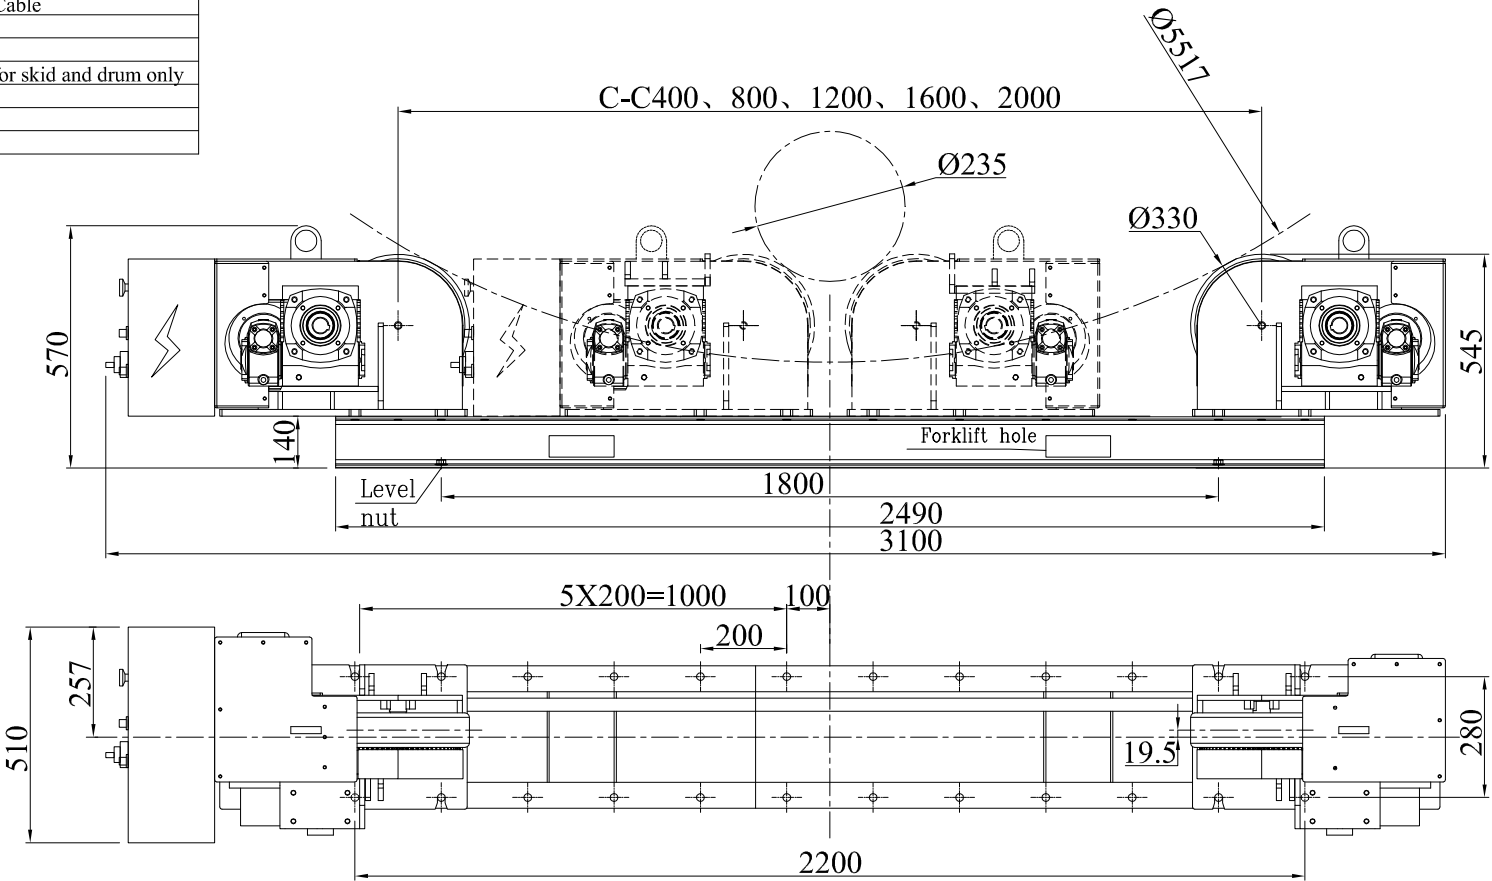

| All dimensions in mm unless otherwise specified. | | | | REV | DATE | DESCRIPTION | EDIT BY | REMARKS | |
|--|-------------------|-------------|----------------|---|------|-------------|---------|---------|---|
| <div><div>REDROCK</div></div> | CUSTOMER APPROVAL | CHECKED BY: | DRAWN BY: Bill | CUSTOMER: | | | | | SCALE: N.T.S. |
| | | | | DRAWING NAME: Rotator SMT power unit | | | | |  |
| | | | | DRAWING NO.: LPP5-5-20-FM-WE | | | | | REVISION: 0 |
| | | | 2012-2-27 | THE ORIGINAL AND ALL COPIES OF THIS DRAWING TOGETHER WITH THE COPYRIGHT THEREOF ARE THE SOLE PROPERTY OF REDROCK. DESIGN AND SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE. | | | | | SHEET: 1 OF 1 |